
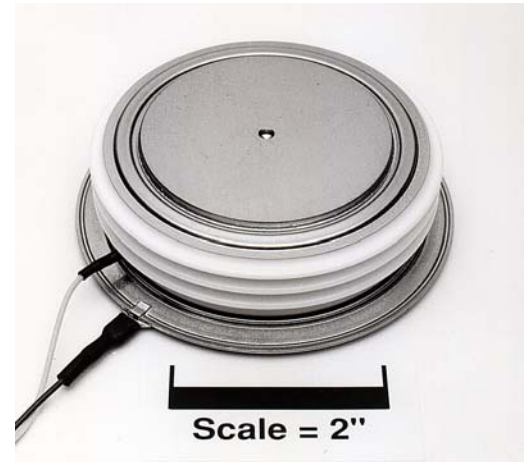


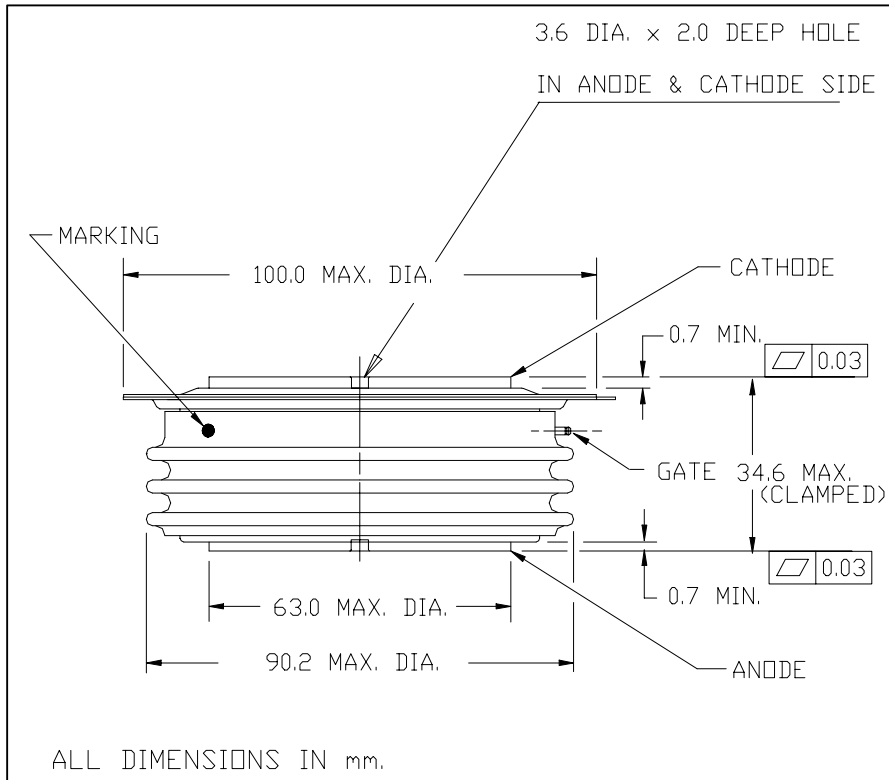

The TAKC is a high voltage, high current disc pack SCR employing a high di/dt gate structure. This gate design allows the SCR to be reliably operated at high di/dt and dv/dt conditions in various phase control applications.

FEATURES:

- Low On-State Voltage
- High di/dt Capability
- High dv/dt Capability
- Hermetic Ceramic Package
- Excellent Surge and I^2t Ratings

APPLICATIONS:

- DC Power Supplies
- Motor Controls
- AC Soft-Starters

ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.
EXAMPLE: TAKC651103DH is a 6500V-1100A SCR with 200ma IGT and 12 inch gate and cathode potential leads.

PART	Voltage Rating $V_{DRM}-V_{RRM}$	Voltage Code	Current Rating I_{TAVG}	Current Code	Turn-Off T_q	Gate I_{GT}	Leads
TAKC	6500	65	1100	11	0	3	DH
	6200	62					
	6000	60			600us (typ.)	200ma (max)	12"

Revised: 4/4/2006

Absolute Maximum Ratings

Characteristic	Symbol	Rating	Units
Repetitive Peak Voltage	$V_{DRM}-V_{RRM}$	6500	Volts
Average On-State Current, $T_C=70\text{ }^{\circ}\text{C}$	$I_{T(Avg.)}$	1100	A
RMS On-State Current, $T_C=70\text{ }^{\circ}\text{C}$	$I_{T(RMS)}$	1728	A
Average On-State Current, $T_C=55\text{ }^{\circ}\text{C}$	$I_{T(Avg.)}$	1275	A
RMS On-State Current, $T_C=55\text{ }^{\circ}\text{C}$	$I_{T(RMS)}$	2003	A
Peak One Cycle Surge Current, 60Hz, $V_R=0V$	I_{TSM}	12,000	A
Peak One Cycle Surge Current, 50Hz, $V_R=0V$	I_{TSM}	11,314	A
Fuse Coordination I^2t , 60Hz	I^2t	6.00E+05	A ² s
Fuse Coordination I^2t , 50Hz	I^2t	6.40E+05	A ² s
Critical Rate-of-Rise of On-State Current	di/dt	100	A/us
Repetitive .67•VDRM			
Critical Rate-of-Rise of On-State Current	di/dt	200	A/us
Non-Repetitive .67•VDRM			
Peak Gate Power, 100us	P_{GM}	16	Watts
Average Gate Power	$P_{G(avg)}$	5	Watts
Operating Temperature	T_j	-40 to+125	$^{\circ}\text{C}$
Storage Temperature	$T_{Stg.}$	-50 to+150	$^{\circ}\text{C}$
Approximate Weight		2.2	lb
		1.00	Kg
Mounting Force		8000-10000	lbs
		35.6 - 44.5	Knewtons

The information on this datasheet is based upon Powerex testing and projected ratings and is subject to change without notice. Powerex makes no implicit or explicit claim to reliability, capability, performance or suitability of this product for a users application. Powerex makes no guarantee of future availability of this product.


Electrical Characteristics, Tj=25°C unless otherwise specified

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Repetitive Peak Forward Leakage Current	I_{DRM}	Tj=125°C, V_{DRM} =Rated		170	200	ma
Repetitive Peak Reverse Leakage Current	I_{RRM}	Tj=125°C, V_{RRM} =Rated		100	150	ma
Peak On-State Voltage	V_{TM}	Tj=125°C, I_{TM} =2000A			2.80	V
V_{TM} Model, Low Level	V_0	Tj=125°C			1.06	V
$V_{TM} = V_0 + r \cdot I_{TM}$	r	15% $I_{TM} - \pi \cdot I_{TM}$			8.37E-04	Ω
V_{TM} Model, 4-Term	A	Tj=125°C			0.00194	
$V_{TM} = A + B \cdot \ln(I_{TM}) +$	B	15% $I_{TM} - I_{TSM}$			0.170	
$C \cdot (I_{TM}) + D \cdot (I_{TM})^{1/2}$	C				0.000609	
	D				0.00619	
Turn-On Delay Time	t_d	$V_D = 0.5 \cdot V_{DRM}$ Gate Drive: 40V - 20 Ω		3.0		us
Turn-Off Time	t_q	Tj=125°C dv/dt = 20V/us to 67% V_{DRM}		650		us
Reverse Recovery Current	$I_{R(Rec)}$	Tj=125°C 1000A -10A/us VR = 50V		220		A
Reverse Recovery Charge	Q_{RR}			2200		uCoul
Reverse Recovery Current Distribution	$I_{R(Rec)}$	Tj=125°C 600A -10A/us VR =50V	5% 140	50% 180	95% 210	A
dv/dt _(Crit)	dv/dt	Tj=125°C Exp. Waveform V_D =67% Rated	1000	>2000		V/us
Gate Trigger Current	I_{GT}	Tj=25°C $V_D = 12V$	30	100	200	ma
Gate Trigger Voltage	V_{GT}		0.8	1.5	3.0	V
Peak Reverse Gate Voltage	V_{GRM}				5	V


Thermal Characteristics

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Thermal Resistance						
Junction to Case	$R\theta_{jc}$	Double side cooled		0.013	0.015	°C/Watt
Case to Sink	$R\theta_{cs}$	Double side cooled		0.0035	0.004	°C/Watt
Thermal Impedance Model	$Z\theta_{jc}$	Double side cooled				
$Z\theta_{jc}(t) = \Sigma(A(N) \cdot (1 - \exp(-t/\tau(N))))$						
where:			N =	1	2	3
			A(N) =	8.33E-04	3.16E-03	6.35E-03
			Tau(N) =	2.53E-06	3.53E-02	4.00E-01
						4
						4.54E-03
						6.43E+00


Maximum On-State Voltage Drop

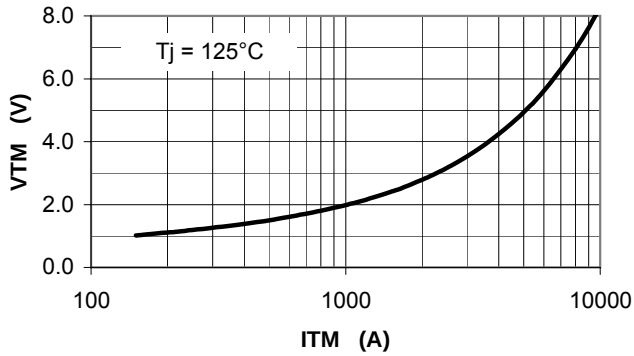


MAXIMUM TRANSIENT THERMAL IMPEDANCE

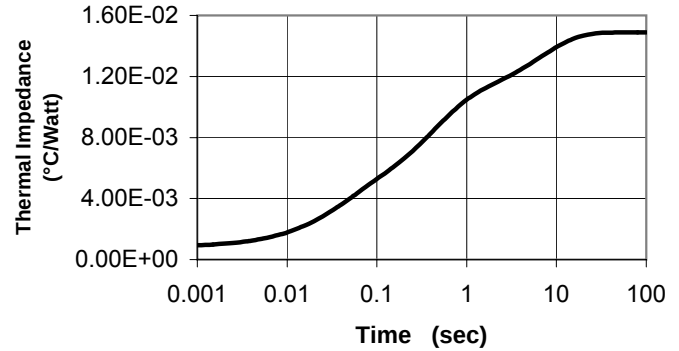


Maximum On-State Power Dissipation

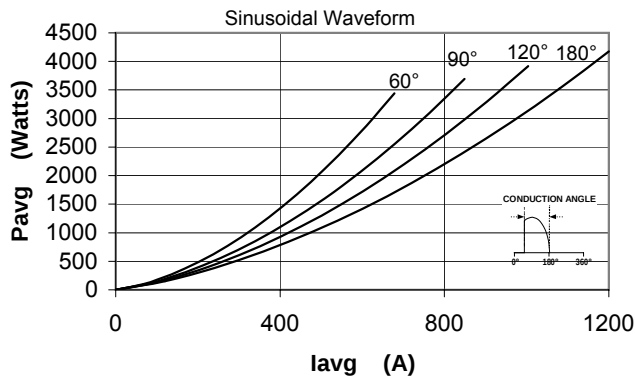

Maximum Allowable Case Temperature
Sinusoidal Waveform

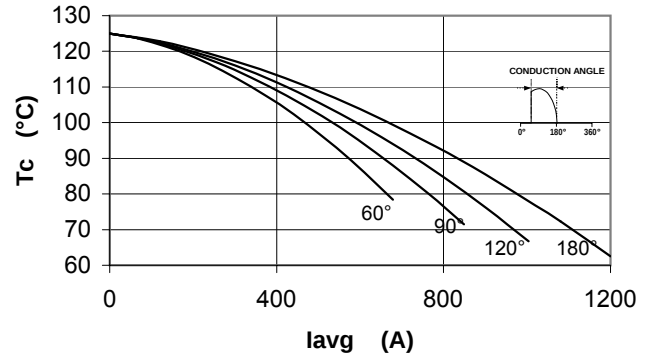

Maximum On-State Power Dissipation

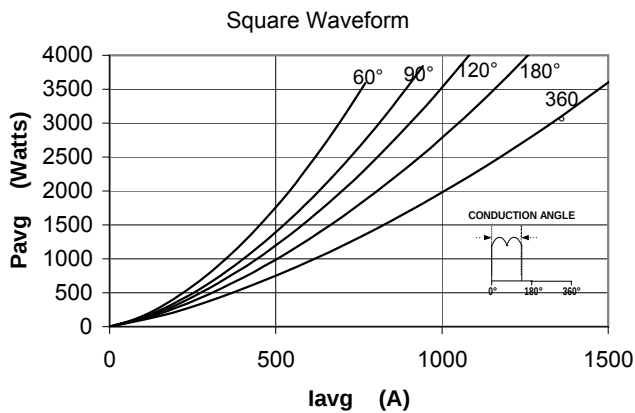

Maximum Allowable Case Temperature
Square Waveform

